

55HX[®] ALUMINUM
FOR MODERN ARCHITECTURE





55HX® BRANDED FOIL

55HX® – PREMIUM ALUMINUM ANODIZING QUALITY

For over 25 years, our Aleris technical experts provide innovative aluminum solutions optimized for architectural applications.

Our committed workforce produces aluminum coils, strips and sheets with high-surface quality and excellent deformation properties.

Five innovation centers around the world continuously develop durable solutions in

collaboration with our customers, in order to meet their demand as well as improve overall processes, e.g. for the building and construction industry.

55HX® – ANODIZED FOR HIGH RESISTANCE

To enhance corrosion and scratch resistance, 55HX® aluminum can be anodized while keeping its unique metallic look. Anodizing may be done in its natural shade or combined with coloring.

55HX® – FOR EXTERIOR AND INTERIOR ARCHITECTURE

Reference projects in different sectors and for various applications illustrate 55HX®'s successful usage inside and outside of buildings in architecture worldwide.

ARCHITECTURAL APPLICATIONS

- Façades and wall cladding
- Ceilings, roofs and balconies
- Pillars and escalator casing

KEY BENEFITS

- Color uniformity across various batches
- Corrosion, UV- and scratch resistant after anodizing
- Excellent deformation properties
- Very good bending properties
- Outstanding durability
- Easy cleaning
- 100% recyclable
- Non-combustible (European Fire Class A1, NFPA 285)



EXTERIOR ARCHITECTURE
Rézo Building in Paris / France
Architectures Anne Démians



INTERIOR ARCHITECTURE
Dalian International Conference Centre / China
Coop Himmelb(l)au

55HX® – BENEFITS AND FEATURES

FAST DELIVERY TIME

Aleris has developed a stock program to meet short delivery times. This gives our customers the required flexibility to respond to sudden market fluctuations or unexpected changes.

TRACEABILITY

55HX® is branded with a special foil and marked with a black ink stencil at the non-visible side of anodizing quality sheets. After etching and anodizing it leaves a kind of braille text surface which is sufficiently readable. This ensures traceability of mill origin during the whole life cycle of the product.

COMPETENCE CENTER

An experienced group of Aleris' field engineers and metallurgists are involved to meet project requirements. With their know-how they can advise on the optimum chemical composition and mechanical properties of the alloy.

COLOR AND GLOSS CONSISTENCY

The 55HX® production from casting through rolling is kept within strict tolerances and closely monitored during the entire production process. This provides the aluminum with perfect surface quality, consistent in color and gloss.

NON-COMBUSTIBLE ALUMINUM

Aluminum is classified Euroclass A1, the highest standard in the European classification system for materials. In addition Aleris 55HX® meets the National Fire Protection Association (NFPA) requirements.

55HX® dimensional capabilities

	Thickness [mm]	Width [mm]
Coil	0.3 - 5	up to 1,650
Sheet	0.6 - 5	up to 1,650

55HX® non-combustible material



European
Fire Class A1

55HX® delivery program

Width x length [mm]	Thickness [mm]					
	1.0	1.5	2.0	2.5	3.0	4.0
1,000 x 2,000	■	■	■	■	■	■
1,250 x 2,500	■	■	■		■	
1,500 x 3,000	■	■	■		■	
1,500 x 4,000		■	■		■	

■ 55HX® anodizing quality

■ 55HX® 10µm or 15µm natural anodized

55HX® chemical composition limits [all data on wt. - %]

Alloy	EN-alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others each	total
55HX®	5005	0.3	0.7	0.2	0.2	0.5 - 1.1	0.1	0.25	-	0.05	0.15

55HX® mechanical properties [typical values]

Alloy	Temper	Thickness [mm]	Tensile strength R _m [MPa]	Yield strength R _{p0.2} [MPa]	Elongation A ₅₀ [%]
55HX®	H14	0.2 ≤ 1.5	145 - 185	min. 120	min. 2
55HX®	H14	1.5 ≤ 3	145 - 185	min. 120	min. 3
55HX®	H14	3 ≤ 5	145 - 185	min. 120	min. 4



55HX® – COLOR UNIFORMITY AND BEST PRACTICE

For the unique metallic look of 55HX®, it is essential to combine a consistent surface finish coil-to-coil aluminum production with a perfectly controlled anodizing process.

For anodizing quality and natural anodized 55HX® (by a certified anodizer), Aleris guarantees color and gloss stability between production batches.

The guarantee applies provided that Aleris guidelines are followed. Color anodizing remains the additional responsibility of the anodizer.

ALERIS RECOMMENDS THE FOLLOWING GUIDELINES:


- Ordering**
 55HX® should be ordered with paper or protective film on the visible side. The UV-resistant film can be removed without residue, provided it was protected against water during storage at temperatures between 5°C and 30°C.
- Handling**
 Loading and unloading of 55HX® should be done very carefully to avoid scratches and other surface defects.
- Fabrication**
 All creative processes such as laser-cutting, punching, perforating and folding, should take place prior to anodizing. All processes influencing the surface quality must be avoided on the visible side. Therefore welding and soldering should only be done at the non-visible side.
- Anodizing**
 A certified anodizer is capable to hold parameters constant, capture their data during the entire process and perform obligatory pre-treatment of the natural oxide layer. Etching must be min. 15µm on the visible side and anodizing layer max. 30µm thick with narrow thickness layer tolerances.
- Installation**
 During wall cladding all panels need to be put up in the same rolling direction. Thicknesses sizes < 2mm and ≥ 2mm should not be intermixed.
- Cleaning**
 Once a year wash with water added with a neutral soft detergent. Afterwards rinse with plain water and dry with a soft and absorbing cloth.



PERFECTION OF FORM
 Friends Arena, Stockholm / Sweden
 Berg Arkitektkontor AB, Arkitekterna Krook & Tjäder



A CITY'S RESOLVE TO HOST LARGE-SCALE WORLD-CLASS EVENTS
 Fiera Milano SpA, Rho / Italy
 Massimiliano Fuksas

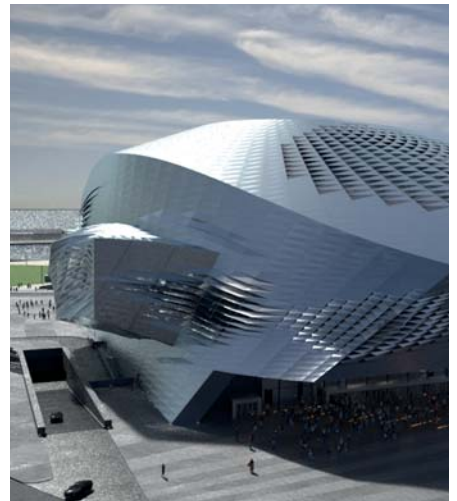


RESEMBLING ARCHITECTURE FROM ANOTHER PLANET
 International Conference Center, Dalian / China
 COOP HIMMELB(L)AU

ENSM MARITIME SCHOOL,
LE HAVRE / FRANCE
AIA ASSOCIÉS



PHOTOGRAPHY: LUC BOEGLY

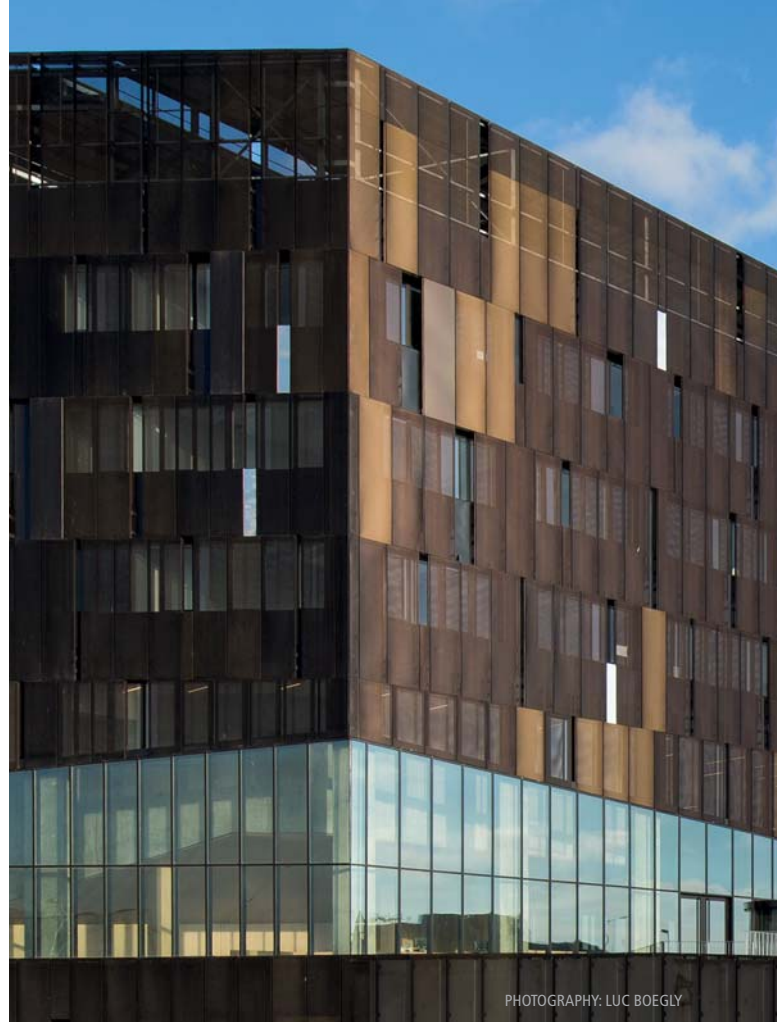


PHOTOGRAPHY: LUC BOEGLY

55HX® – UNLIMITED CREATIVE POTENTIAL

55HX® allows architects to design the material in line with their individual needs. The easiness of its bending, perforating, punching and deep-drawing have made it the outstanding aluminum solution. After anodizing aluminum substrate is weather-, corrosion- and UV-resistant while maintaining the authentic metallic gloss as well as the durability.

To view more references, request a color sample or look into technical details, visit www.aleris.com/industries/architecture-and-design/


THE COLOR VARIETY OF 55HX®

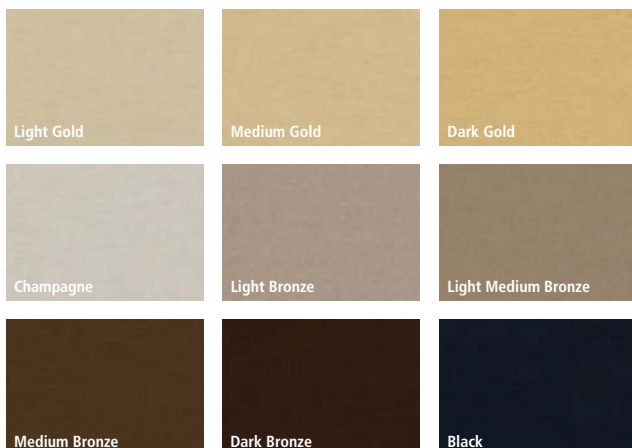


other colors possible
(upon request)



FIND HERE YOUR 55HX®
NATURAL ANODIZED ALUMINUM SAMPLE

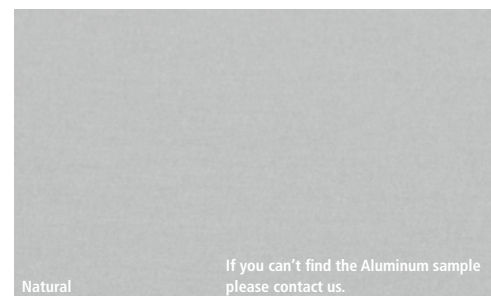

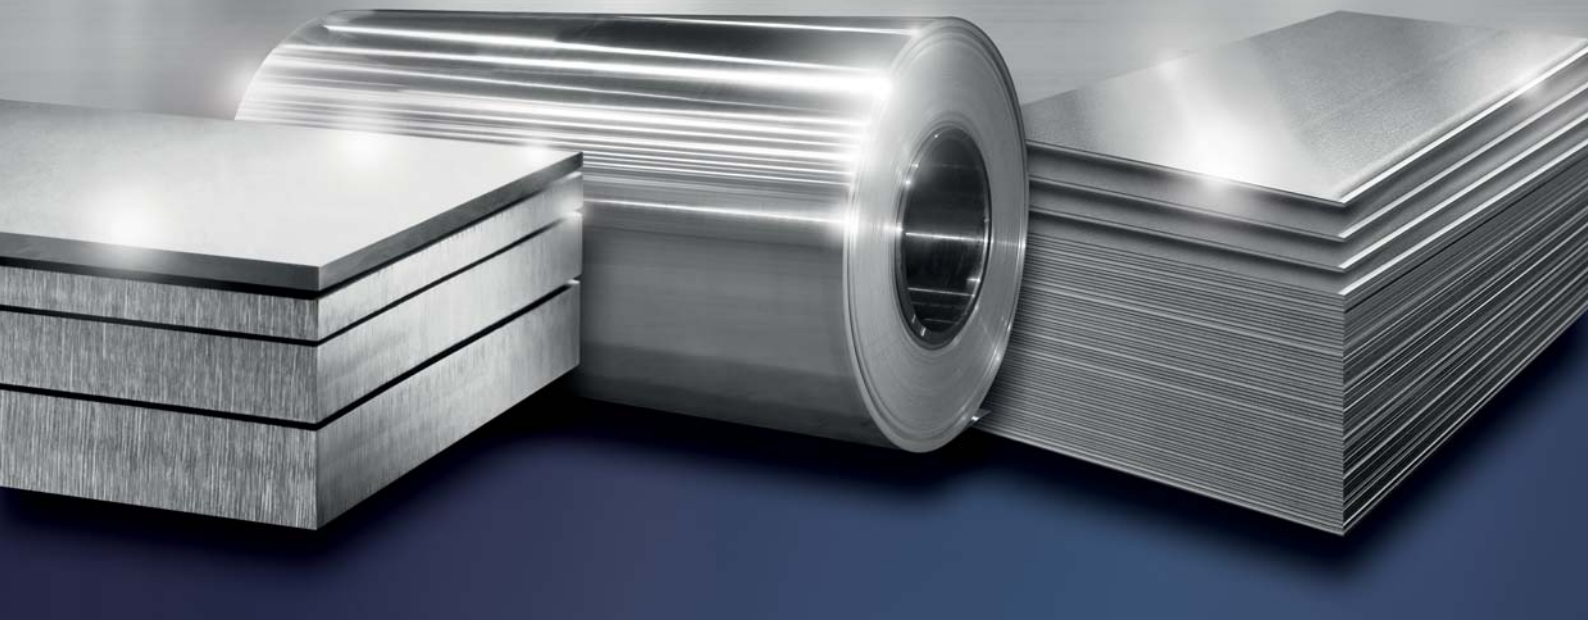

TITLE:

ICE RINK, MÉDIACITÉ, LIÈGE / BELGIUM

L'ESCAUT ARCHITECTURES

ET BUREAU D'ÉTUDES WEINAND

Aleris Aluminum Duffel BVBA

A. Stocletlaan 87
2570 Duffel · Belgium
T +32 15 30 2752
55HX@aleric.com

Aleris Global Headquarters

25825 Science Park Drive - Suite 400
Cleveland, Ohio 44122-7392 · USA
T +1 216 910 3400
info.aleric@aleric.com

www.aleric.com

Care has been taken to ensure that this information is accurate. Although any information or recommendation contained herein is given in good faith, we make no warranty or guarantee, express or implied, (i) that our products meet your specific requirements, and (ii) that the results described herein will be obtained under end-use conditions, and (iii) as to the effectiveness or safety of our products, services or recommendations. Except as provided in our general terms of sale and delivery, we shall not be responsible for any loss resulting from use of our products or services described herein. The materials, products and services described herein are sold subject to our general terms of sale and delivery, which can be found at <https://www.aleric.com/locations> and are available upon request.

The Aleris logo features the word "Aleris" in a bold, red, sans-serif font. A thin, grey, curved line arches over the top of the letters "A" and "l", extending from the left side of the "A" towards the right.

© 2017, Aleris Corporation
Issue 02/17 · 3rd release